

CalDigit Thunderbolt™ 3







miniDock

Return of the Ports

**Authentic
Thunderbolt 3 Dock**

Delivering the full
40Gb/s Bandwidth

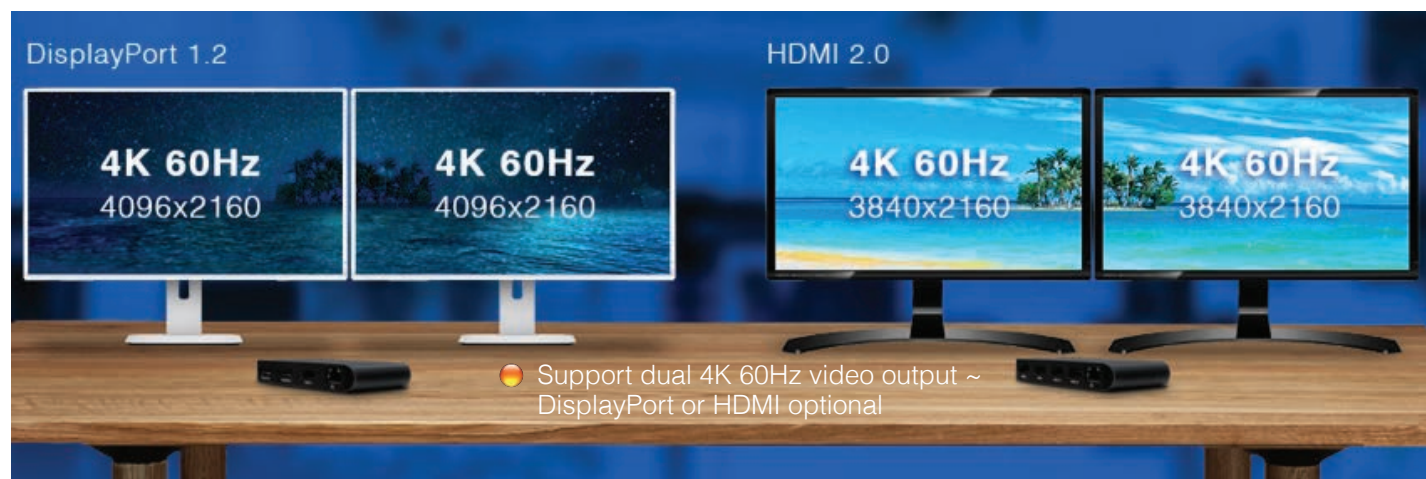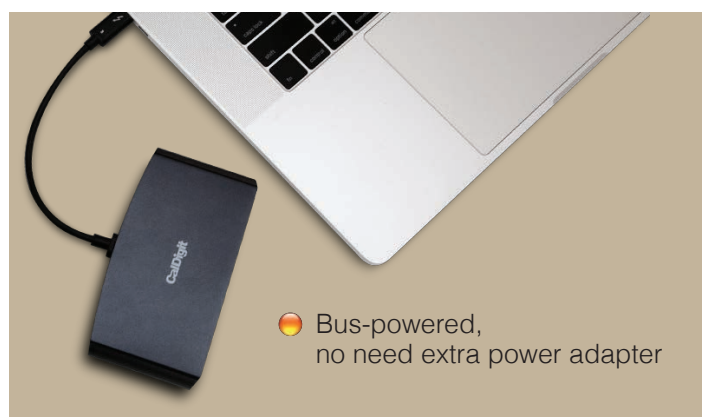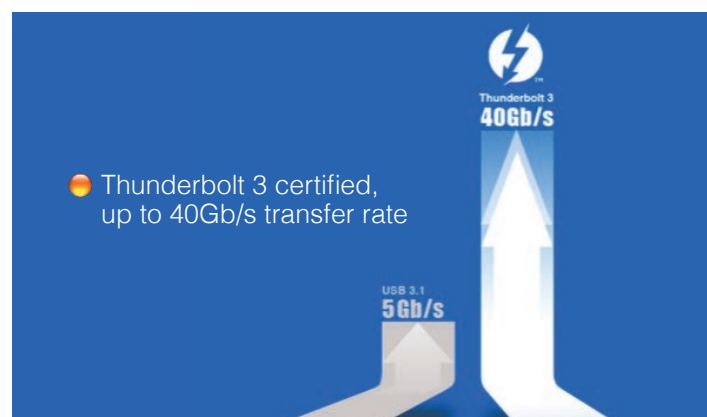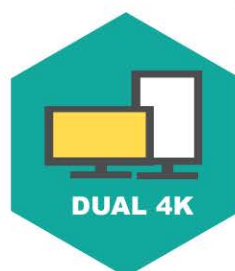



- Compliant to the power budget of 15W of down-streaming Thunderbolt port, assure all I/O ports working normally under sufficient power consumption
- Thermal dissipation verified
- Aluminum housing, compact & stylish
- Plug & Play, no driver needed
- Highly portability
- Mac & Windows compatible

► The Difference between CalDigit mini Dock & general USB-C Hub on the market :

1. Thunderbolt 3 specification, up to 40Gb/s throughput , highly elevate performance of workflows
2. Thunderbolt 3 certified, it has passed strict validation tests
3. Fully compliant to Thunderbolt 3 Type-C power budget design, free of power insufficiency & thermal issues
4. Assure dual 4K 60Hz displays , no worry about green display or no video output issues
5. Aluminum housing, compact design with high efficiency on heat dissipation
6. High CP value product



Specification	DisplayPort	HDMI
Thunderbolt 3 port	1x ; 40Gb/s transfer rate	1x ; 40Gb/s transfer rate
Display	2x DisplayPort 1.2, 4K (4096x2160)@60Hz	2x HDMI 2.0, 4K (3840x2160)@60Hz
USB	1x USB3.0 Type-A	1x USB3.0 Type-A; 1x USB2.0 Type-A
Gigabit Ethernet	1x	1x
Bus powered	Yes	Yes
Operating System	Mac OS X & Windows 10	Mac OS X & Windows 10
Operating temperature	0°C ~ 35°C (32°F ~ 95°F)	0°C ~ 35°C (32°F ~ 95°F)
Storage temperature	-20°C ~ 45°C (-4°F ~ 113°F)	-20°C ~ 45°C (-4°F ~ 113°F)
Environmental humidity	0% to 95% non-condensing	0% to 95% non-condensing
Enclosure material	Aluminum	Aluminum
LED indicator	RJ45	RJ45
Dimension	4.88x2.56x0.74 inch (124x65x18.8 mm)	4.88x2.56x0.74 inch (124x65x18.8 mm)
Weight	140g	140g

